


5-Year Limited Tank/Parts Warranty*

Tiny Titan® solves big problems! The 2-1/2 gallon Tiny Titan® compact water heater gets hot water to out-of-the-way locations, without complicated and expensive plumbing and electrical installation. This saves time, energy and money. It mounts easily to a wall, under a sink or inside a cabinet. The Tiny Titan® is ideal for wet bars, strip malls, hair salons, garages, and doctors' offices.

- **Heating Element**
Stainless steel, direct immersion, 1500 watt, 120 volt heating element for maximum efficiency.
- **120 VAC Standard Plug-In Cord**
Plug-in cord makes installation easy.
- **Wall Mounting Bracket Included**
Makes installation quick and easy
- **Externally Adjustable Temperature Control**
Simple to adjust temperature control mounted in front panel.
- **On/Off Switch**
Conveniently located with power indication light.
- **Non-CFC Foam Insulation**
Environmentally friendly foam insulation saves energy by minimizing heat loss.
- **1/2" Top Water Connections**
Color coded blue and red to mark cold and hot water connections.
- **3/4" T&P Valve Factory Installed**
- **Impact-Resistant, Non-Metallic Case**
Sturdy, colorful, stain-resistant case is attractive for any application.
- **Code Approvals**
Listed to UL 174.
- **Quick and Easy Installation**



*For complete warranty information consult the written warranty of American Water Heaters found at www.americanwaterheater.com, or call (800) 999-9515.

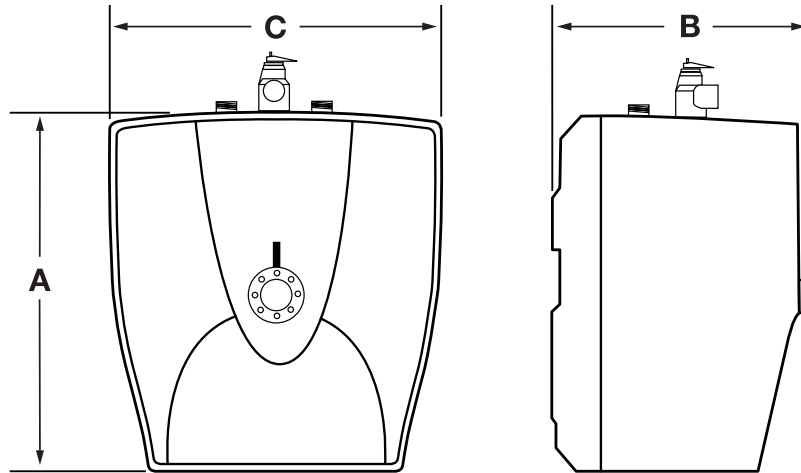

MODEL NUMBER	GALLON CAPACITY	GPH RECOVERY 90° RISE	EF	A	DEPTH B	WIDTH C	APPROX. SHIPPING WEIGHT
E1E2.5US015V	2.5	6.8	N/A	13-3/4	11	13-3/4	18

1/2" Top water connections. Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. Dimensions on all charts shown in inches.

Specification

Residential electric water heater(s) shall be point-of-use model E1E2.5US015V by American Water Heaters, or an approved equal, and shall have a 5-year tank warranty and a 5-year parts warranty, when installed in a residential application. Heater(s) shall have a storage capacity of 2.5 gallons and shall have a rated input of 1.5KW at 120 Volts, single phase, 60 cycle AC, and shall be designed, tested and listed in accordance with Underwriter's Laboratories standard UL 174. The interior of the storage tank shall be lined with a special coating. The unit must be equipped with a standard 120V plug-in cord. Electrical heating element shall be flanged, direct immersion, stainless steel sheathed, resistance type. Element operation shall be controlled by a thermostat. A high temperature cut-off shall be supplied as an integral part of the heater. The tank shall be totally encased in an impact-resistant, non-metallic case. The tank must be design certified for 300 PSI test pressure and 150 PSI working pressure.

Distributed By:

Order Entry and Sales

500 Princeton Road (FEDEX, UPS)
Johnson City, TN 37601-2030
P.O. Box 4808 (Mailing)
Johnson City, TN 37602-4808
(800) 937-1037
FAX (800) 581-7224

Warranty and Service

500 Princeton Road (FEDEX, UPS)
Johnson City, TN 37601-2030
P.O. Box 1597 (Mailing)
Johnson City, TN 37605-1597
(800) 999-9515
FAX (800) 999-5210

NRESS00708