

## PROLINE® MOBILE HOME COMMERCIAL-GRADE RESIDENTIAL

### APPROVED FOR MANUFACTURED HOUSING

- All residential electric water heaters are compliant with HUD Standards for mobile homes/ manufactured housing.

### SIDE WATER CONNECTIONS

- For ease of installation in mobile home applications.

### COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

### LONG-LASTING HEATING ELEMENTS

- Screw-in, direct immersion, 3500W/240V or 3000W/120V heating elements for maximum efficiency.

### BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

### ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/close) radius, which not only permits full straight-through water flow but also a quick and positive shut off.

### CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IESNA 90.1
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy and Conservation Act (EPCA), as amended.

### CERTIFIED TO UL 174 FOR HOUSEHOLD ELECTRIC WATER HEATERS

### CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

### DESIGN-LISTED BY UNDERWRITERS LABORATORIES

- Certified at 300 PSI test pressure and 150 PSI working pressure.
- Listed according to UL 174 standards governing storage tank-type electric water heaters.

### 6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to [www.americanwaterheater.com](http://www.americanwaterheater.com).



Low Lead Content







# COMMERCIAL-GRADE RESIDENTIAL ELECTRIC WATER HEATERS

Model Number	Nominal Capacity	Rated Storage Volume	First Hour Rating (Gallons)	UEF	Recovery @ 90°F Rise Gallon Per Hour	Voltage	Wattage		Dimensions in Inches		Approx. Shipping Weight (lbs)
							Upper Element	Lower Element	Height to Top of Heater	Diameter	
EMH6-30H	30	27	50	0.90	14	120	3000	3000	46-3/4	19	98
EMH6-30H	30	27	50	0.90	16	240	3500	3500	46-3/4	19	98
EMH6-30H	30	27	50	0.90	21	240	4500	4500	46-3/4	19	98
EMH6-40RW	40	36	40	0.91	14	120	3000	3000	50	22	109
EMH6-40RW	40	36	40	0.91	16	240	3500	3500	50	22	109
EMH6-40R	40	36	54	0.95	21	240	4500	4500	50	22	109
EMH6-30L*	28	26	47	0.90	14	120	3000	3000	30	22	96
EMH6-30L*	28	26	47	0.90	16	240	3500	3500	30	22	96
EMH6-30L*	28	26	47	0.90	21	240	4500	4500	30	22	96

\*Models ship with supplied insulation blanket.  
 Models have limited element options due to element size or other restrictions.  
 Top T&P option not available on these models.  
 3/4" water connections.  
 Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvements.

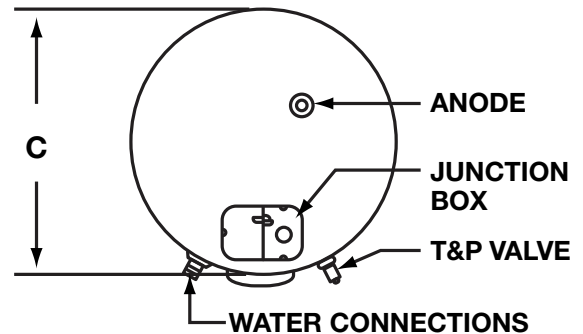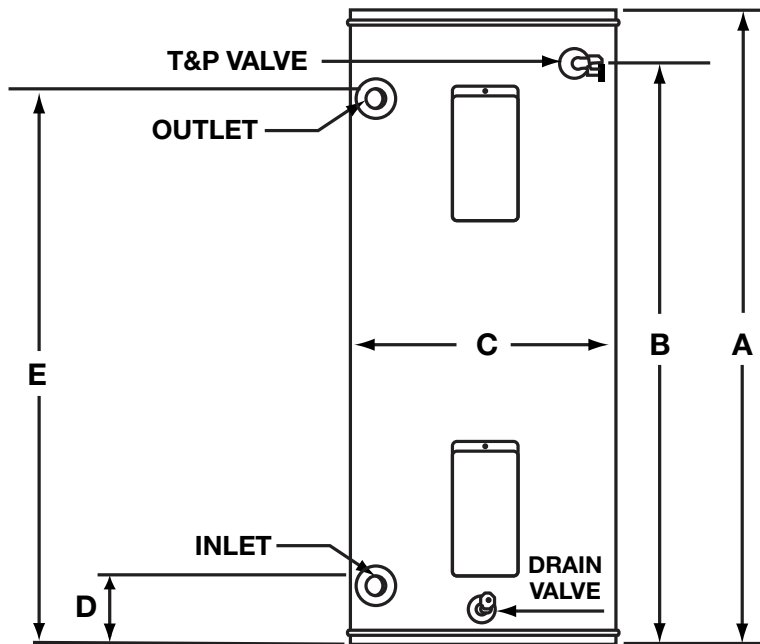

For technical information call (800) 999-9515. American Water Heaters reserves the right to make product changes or improvements without prior notice.